

A MODEL REDUCTION APPROACH TO NUMERICAL INVERSION FOR A PARABOLIC PARTIAL DIFFERENTIAL EQUATION

LILIANA BORCEA*, VLADIMIR DRUSKIN†, ALEXANDER V. MAMONOV‡, AND MIKHAIL ZASLAVSKY§

Abstract. We propose a novel numerical inversion algorithm for parabolic partial differential equations, based on model reduction. The study is motivated by the application of controlled source electromagnetic exploration, where the unknown is the subsurface electrical resistivity and the data are time resolved surface measurements of the magnetic field. The algorithm presented in this paper considers a layered medium. The reduced model is obtained with rational interpolation in the frequency (Laplace) domain and a rational Krylov subspace projection method. It amounts to a nonlinear mapping from the function space of the unknown resistivity to the small dimensional space of the parameters of the reduced model. We use this mapping as a nonlinear preconditioner for the Gauss-Newton iterative solution of the inverse problem. The advantage of the inversion algorithm is twofold. First, the nonlinear preconditioner resolves most of the nonlinearity of the problem. Thus the iterations are less likely to get stuck in local minima and the convergence is fast. Second, the inversion is computationally efficient because it avoids repeated computations of the time domain solutions of the forward problem. We study the stability of the inversion algorithm for various rational Krylov subspaces, and assess its performance with numerical experiments.

Key words. Inverse problem, parabolic, CSEM, model reduction, rational Krylov subspace projection

AMS subject classifications. 65M32, 41A20

1. Introduction. Inverse problems for parabolic partial differential equations arise in applications such as groundwater flow, solute transport and controlled source electromagnetic oil and gas exploration. We consider the latter problem, where the unknown $r(\mathbf{x})$ is the electrical resistivity, the coefficient in the diffusion Maxwell system satisfied by the magnetic field $\mathbf{H}(t, \mathbf{x})$

$$(1.1) \quad -\nabla \times [r(\mathbf{x})\nabla \times \mathbf{H}(t, \mathbf{x})] = \frac{\partial \mathbf{H}(t, \mathbf{x})}{\partial t},$$

for time $t > 0$ and $\mathbf{x}$ in some domain Ω . The data are time resolved measurements of $\mathbf{H}(t, \mathbf{x})$ at receivers located on the boundary of Ω .

Inversion is challenging specially because the problem is ill-posed and thus sensitive to noise. A typical numerical approach is to minimize a functional given by the least squares data misfit and a regularization term, using Gauss-Newton or nonlinear conjugate gradient methods [22, 25, 23]. There are two main drawbacks. First, the functional to be minimized is not convex and the optimization algorithms can get stuck in local minima. The lack of convexity can be overcome to some extent by adding more regularization at the cost of artifacts in the solution. Nevertheless, convergence may be very slow [23]. Second, evaluations of the functional and its derivatives are computationally expensive, because they involve multiple numerical solutions of the forward problem. In applications the computational domains may be large with meshes refined near sources, receivers and regions of strong heterogeneity. This results in a large number of unknowns in the forward problem, and time stepping with such large systems is expensive over long time intervals.

*Computational and Applied Mathematics, Rice University, 6100 Main St. - MS 134, Houston, TX 77005-1892 USA (borcea@rice.edu)

†Schlumberger-Doll Research Center, 1 Hampshire St., Cambridge, MA 02139-1578 USA (druskin1@slb.com)

‡Institute for Computational Engineering and Sciences (ICES), The University of Texas at Austin, 201 East 24th St. Stop C0200, Austin, TX 78712-1229 USA (mamonov@ices.utexas.edu)

§Schlumberger-Doll Research Center, 1 Hampshire St., Cambridge, MA 02139-1578 USA (mzaslavsky@slb.com)

We propose a numerical inversion approach that arises when considering the inverse problem in the model reduction framework. In this paper we limit the study to the one dimensional parabolic equation

$$(1.2) \quad \frac{\partial}{\partial x} \left[r(x) \frac{\partial u(t, x)}{\partial x} \right] = \frac{\partial u(t, x)}{\partial t},$$

for x in the interval $[0, 1]$. It can be derived from (1.1) in the case of a layered medium in a slab $\Omega = [0, 1] \times \mathbb{R}^2$, and for a magnetic field

$$(1.3) \quad \mathbf{H}(t, \mathbf{x}) = u(t, x) \mathbf{e}_z, \quad \mathbf{x} = x \mathbf{e}_x + y \mathbf{e}_y + z \mathbf{e}_z.$$

The function $u(t, x)$ satisfies the boundary conditions

$$(1.4) \quad \frac{\partial u(t, 0)}{\partial x} = u(t, 1) = 0, \quad t > 0,$$

and the initial condition

$$(1.5) \quad u(0, x) = \delta(x),$$

corresponding to a point source at $x = 0$.

The reduced model is obtained with a rational Krylov subspace projection method. These methods have been applied to forward problems for parabolic equations in [7, 10, 11, 14]. They have been introduced recently for inversion in [12, 20], where the reduced models are obtained using rational interpolation of the transfer function in the Laplace domain. Introduction of the reduced order models allows to replace the solution of the full scale parabolic problem by its low order projection, thus resolving one of the inversion challenges mentioned above, namely the one of high computational cost.

The transfer function is the Laplace transform of the time domain response

$$(1.6) \quad y(t) = u(t, 0), \quad t > 0,$$

and the reduced model is its rational approximant. Conventionally, it is parametrized in terms of its poles and residues. Instead we suggest to use the parametrization in terms of the coefficients of the continued fraction expansion of the rational approximant. This rational approximant itself can be viewed as the transfer function of a finite difference discretization of (1.2) on a special rather coarse grid, known in the literature as the optimal or spectrally matched grid, or as a finite-difference Gaussian rule [8]. The continued fraction coefficients are the entries in the finite difference operator, the discrete resistivities. Thus we define the nonlinear mapping $\mathcal{Q}$ from the function space of the unknown $r(x)$ to the small dimensional space of the discrete resistivities. That allows us to mitigate the other inversion challenge mentioned above, as follows. Mapping $\mathcal{Q}$ takes the function $r(x)$ to the discrete resistivities and it appears to resolve most of the nonlinearity of the problem. We use it as a preconditioner of the Gauss-Newton iteration, which is less likely to get stuck in local minima and converges quickly, even when the initial guess is far from the true $r(x)$. This fact, combined with the small number of Gauss-Newton iterations leads to a computationally efficient inversion algorithm.

The paper is organized as follows: We begin in section 2 with the formulation of the problem. The projection based model reduction and its use in inversion are described in section 3. We compare the performance of various types of reduced models for inversion in section 4. The details of the computation of the nonlinear mapping $\mathcal{Q}$ and its Jacobian are given in section 5. The outline of the inversion algorithm and the numerical results are in section 6. We conclude with a summary in section 7.

2. Problem formulation. To adhere to the conventional setting of model reduction, we consider the semidiscretized equation (1.2), written as

$$(2.1) \quad \frac{\partial \mathbf{u}(t)}{\partial t} = A(\mathbf{r})\mathbf{u}(t),$$

for the vector $\mathbf{u}(t) \in \mathbb{R}^N$ of discrete values of $u(t, x)$ on a fine uniform grid with N points in the interval $[0, 1]$. Here

$$(2.2) \quad A(\mathbf{r}) = -D^T \text{diag}(\mathbf{r})D$$

is a symmetric and negative definite operator, the discretization of $\partial_x[r(x)\partial_x]$. The vector $\mathbf{r}$ contains the discrete values of $r(x)$ and D is the finite difference discretization of the derivative in x , for the boundary conditions (1.4). The initial condition is

$$(2.3) \quad \mathbf{u}(0) = \frac{1}{h} \mathbf{e}_1,$$

the approximation of (1.5) on the grid with spacing $h = 1/(N + 1)$, and the time-domain response of the discrete system is given by

$$(2.4) \quad y(t; \mathbf{r}) = \mathbf{e}_1^T \mathbf{u}(t).$$

It is the analogue of (1.6), and we emphasize in the notation that it depends on the vector $\mathbf{r}$ of discrete resistivities.

The measured time domain data is denoted by

$$(2.5) \quad d(t) = y(t; \mathbf{r}^{\text{true}}) + \xi(t), \quad t > 0,$$

where $\xi(t)$ is due to noise and the discretization errors. The vector $\mathbf{r}^{\text{true}}$ in (2.5) is to be recovered from the given $d(t)$. We estimate it by $\mathbf{r}^*$, the solution of the nonlinear optimization problem

$$(2.6) \quad \mathbf{r}^* = \arg \min_{\mathbf{r} \in \mathcal{S}} \frac{1}{2} \|\mathcal{Q}(d(t)) - \mathcal{Q}(y(t; \mathbf{r}))\|_2^2 + \frac{\alpha}{2} \mathcal{P}(\mathbf{r}),$$

over the admissible set of resistivities $\mathcal{S} \subset \mathbb{R}_+^N$. The optimization is regularized by adding a functional $\mathcal{P}(\mathbf{r})$ with a parameter α . For example, $\mathcal{P}(\mathbf{r})$ may be the total variation norm of $\mathbf{r}$, or the square of the ℓ_2 norm of $\mathbf{r}$. The map

$$(2.7) \quad \mathcal{Q} : C(0, +\infty) \rightarrow \mathbb{R}^q$$

is a *nonlinear preconditioner* that maps the time domain response functions to the space of dimension $q \ll N$ of the parameters of the reduced model.

It is typical in inversion not to have a preconditioner, and therefore minimize the L_2 norm of the (weighted) misfit between the measured data $d(t)$ and the model $y(t; \mathbf{r})$. The main contribution of this paper is to introduce the nonlinear preconditioner $\mathcal{Q}$ so that the optimization problem (2.6) becomes well posed even in the absence of the regularization term $\mathcal{P}(\mathbf{r})$. All the instabilities are in the computation of $\mathcal{Q}(d(t))$. We stabilize it by limiting the dimension q of the reduced model, depending on the level of noise. The resolution of the estimated resistivity depends on q , so there is a trade-off between the stability and resolution of the reconstruction. Note that since $q \ll N$, the Jacobian $\mathcal{D}\mathcal{Q}$ of $\mathcal{Q}$ has a large null space and the vector of residuals is in the column space of $\mathcal{D}\mathcal{Q}$. If we have prior information about $\mathbf{r}^{\text{true}}$, we can use it to improve the reconstruction $\mathbf{r}^*$ by adding corrections in the null space of $\mathcal{D}\mathcal{Q}$ that minimize the regularization term $\mathcal{P}(\mathbf{r})$ without affecting the residual.

3. Model order reduction and inversion. In this section we show how we can use the model order reduction framework to obtain the nonlinear preconditioner $\mathcal{Q}$ in (2.6). For this purpose we treat (2.1)–(2.4) as a dynamical system. We symmetrize the system for convenience by taking equal initial value and measurement vectors defined by

$$(3.1) \quad \mathbf{b} = \frac{1}{\sqrt{h}} \mathbf{e}_1.$$

The transfer function of the dynamical system is the Laplace transform of the time domain response

$$(3.2) \quad G(s; \mathbf{r}) = \int_0^{+\infty} y(t; \mathbf{r}) e^{-st} dt = \mathbf{b}^T (sI - A(\mathbf{r}))^{-1} \mathbf{b}, \quad s > 0.$$

Note that since $A(\mathbf{r})$ is negative definite, all poles of the transfer function are negative and the dynamical system is stable.

In model order reduction we obtain a reduced model $(A_m, \mathbf{b}_m)$ so that its transfer function

$$(3.3) \quad G_m(s) = \mathbf{b}_m^T (sI_m - A_m)^{-1} \mathbf{b}_m$$

is a good approximation of $G(s; \mathbf{r})$ as a function of s in some norm. Here I_m is the $m \times m$ identity matrix, $A_m \in \mathbb{R}^{m \times m}$, $\mathbf{b}_m \in \mathbb{R}^m$ and $m \ll N$. The dimension $q = q(m)$ of our reduced model is defined later in terms of m . Note that while the matrix $A(\mathbf{r})$ given by (2.2) is sparse, the reduced order matrix A_m is typically dense. Thus, it has no straightforward interpretation as some coarse discretization of the differential operator $\partial_x[r(x)\partial_x]$.

3.1. Projection-based model reduction. Projection-based methods search for reduced models of the form

$$(3.4) \quad A_m = V^T A V, \quad \mathbf{b}_m = V^T \mathbf{b}, \quad V^T V = I_m,$$

where the columns of $V \in \mathbb{R}^{N \times m}$ form an orthonormal basis of an m -dimensional subspace of $\mathbb{R}^N$ on which the system is projected.

The choice of V depends on the *matching conditions* for G_m and G . They prescribe the sense in which G_m approximates G . Here we consider moment matching at *interpolation nodes* $\sigma_j \in [0, +\infty)$ that may be distinct or coinciding,

$$(3.5) \quad \left. \frac{\partial^k G_m}{\partial s^k} \right|_{s=\sigma_j} = \left. \frac{\partial^k G}{\partial s^k} \right|_{s=\sigma_j}, \quad k = 0, \dots, 2M_j - 1, \quad j = 1, \dots, l.$$

The multiplicity of a node σ_j is denoted by M_j , so at non-coinciding nodes $M_j = 1$. The reduced order transfer function G_m matches G and its derivatives up to the order $2M_j - 1$, and the size m of the reduced model is given by

$$m = \sum_{j=1}^l M_j.$$

Note from (3.3) that $G_m(s)$ is a rational function of s , so (3.5) is a rational interpolation problem. The function $G_m(s)$ admits the partial fraction representation

$$(3.6) \quad G_m(s) = \sum_{j=1}^m \frac{c_j}{s + \theta_j}, \quad c_j > 0, \quad \theta_j > 0.$$

Its poles $-\theta_j$ are the eigenvalues of A_m and the residues c_j are defined in terms of the normalized eigenvectors $\mathbf{z}_j$,

$$(3.7) \quad c_j = (\mathbf{b}_m^T \mathbf{z}_j)^2, \quad A_m \mathbf{z}_j + \theta_j \mathbf{z}_j = 0, \quad \|\mathbf{z}_j\| = 1, \quad j = 1, \dots, m.$$

For the reduced models (3.4), the conditions (3.5) are known to be equivalent to the columns of V being an orthogonal basis of the rational Krylov subspace

$$(3.8) \quad \mathcal{K}_m(\boldsymbol{\sigma}) = \text{span} \{(\sigma_j I - A)^{-k} \mathbf{b} \mid j = 1, \dots, l; k = 1, \dots, M_j\}.$$

The interpolation nodes, obviously, should be chosen in the resolvent set of $A(\mathbf{r})$. Moreover, since in reality we need to solve a limiting continuum problem, the nodes should be in the closure of the intersection of the resolvent sets of any sequence of the finite-difference operators convergent to the continuum problem. This set is $\mathbb{C} \setminus (0, \infty]$ for the continuum problems on bounded domains and $\mathbb{C} \setminus [0, \infty]$ for the unbounded ones.

Ideally, in the solution of the inverse problem we would like to minimize the time (or frequency) domain data misfit in a quadratic norm weighted in accordance with the statistical distribution of the measurement error. When considering the reduced order model, it is natural to choose the interpolation nodes that give the most accurate approximation in that norm. Such interpolation is known in control theory as $\mathcal{H}_2$ (Hardy space) optimal, and in many cases the optimal interpolation nodes can be found numerically [18]. Moreover, it was shown in [12], that the solution of the inverse problem using reduced order models with such interpolation nodes also minimizes the misfit functional (in the absence of measurement errors). When such nodes are not available, we can select some reasonable interpolation nodes chosen based on a priori error estimates, for example, the so-called Zolotarev points or their approximations obtained with the help of potential theory [10, 24]. In most cases such choices lead to interpolation nodes distributed geometrically.

3.2. Inversion via model reduction. Inversion via model order reduction was first introduced in [12, 13, 20]. In particular, the approach of [12] produces the preconditioner $\mathcal{Q}_{pr}(y(\cdot; \mathbf{r}))$ given by the following chain of mappings

$$(3.9) \quad \mathcal{Q}_{pr}(y(\cdot; \mathbf{r})) : \mathbf{r} \xrightarrow{(a)} A(\mathbf{r}) \xrightarrow{(b)} V \xrightarrow{(c)} A_m \xrightarrow{(d)} \{(c_j, \theta_j)\}_{j=1}^m,$$

where (a) is given by (2.2), (b) involves orthogonalization of a basis for $\mathcal{K}_m(\boldsymbol{\sigma})$, (c) is simply (3.4) and (d) is obtained from (3.7). Thus, $\mathcal{Q}_{pr}(y(\cdot; \mathbf{r}))$ maps $\mathbf{r} \in \mathbb{R}^N$ to a vector of residues and poles $(c_1, \dots, c_m, \theta_1, \dots, \theta_m)^T \in \mathbb{R}_+^q$ with $q = 2m$. Since the poles and residues do not have a physical meaning of resistivity, $\mathcal{Q}_{pr}$ cannot be an approximation of identity, as we would expect a good nonlinear preconditioner to be.

Here we propose to modify (3.9) using ideas from [4, 17]. We add another mapping to the chain so that the resulting operator $\mathcal{Q}(y(\cdot; \mathbf{r}))$ approximates the identity. For this purpose observe that the positive residues and poles $\{(c_j, \theta_j)\}_{j=1}^m$ define a rational function (3.6) which admits a representation as a Stieltjes continued fraction with positive coefficients

$$(3.10) \quad G_m(s) = \frac{1}{\hat{\kappa}_1 s + \frac{1}{\kappa_1 + \frac{1}{\hat{\kappa}_1 s + \frac{1}{\ddots + \frac{1}{\hat{\kappa}_m s + \frac{1}{\kappa_m}}}}}}.$$

The function (3.10) is known [8] to be a boundary response function $w_1(s)$ of a second order finite difference scheme with a three point stencil

$$(3.11) \quad \frac{1}{\widehat{\kappa}_j} \left(\frac{w_{j+1} - w_j}{\kappa_j} - \frac{w_j - w_{j-1}}{\kappa_{j-1}} \right) - sw_j = 0, \quad j = 2, \dots, m,$$

and boundary conditions

$$(3.12) \quad \frac{1}{\widehat{\kappa}_1} \left(\frac{w_2 - w_1}{\kappa_1} \right) - sw_1 + \frac{1}{\widehat{\kappa}_1} = 0, \quad w_{m+1} = 0.$$

These equations resemble the Laplace transform of (2.1), but here the discretization is at much fewer nodes than N . The coefficients $\widehat{\kappa}_j$ and κ_j have the meaning of resistivity and inverse resistivity, respectively.

The chain of mappings for computing the nonlinear preconditioner is

$$(3.13) \quad \mathcal{Q}(y(\cdot; \mathbf{r})) : \mathbf{r} \xrightarrow{(a)} A(\mathbf{r}) \xrightarrow{(b)} V \xrightarrow{(c)} A_m \xrightarrow{(d)} \{(c_j, \theta_j)\}_{j=1}^m \xrightarrow{(e)} \{(\kappa_j, \widehat{\kappa}_j)\}_{j=1}^m,$$

and the dimension q of the space of parameters of the reduced model in (2.7) is given by

$$(3.14) \quad q = 2m.$$

The mapping (e) can be computed with a variant of the Lanczos iteration, as explained in section 5. Alternatively, the composition of (d) and (e) taking A_m to the continued fraction coefficients can be computed directly via a Lanczos iteration.

The computation of $\mathcal{Q}(y(\cdot; \mathbf{r}))$ for a trial $\mathbf{r}$ via (3.13) is a stable procedure. However, the objective function in (2.6) also contains the term $\mathcal{Q}(d(t))$ whose computation is ill-conditioned. This instability is unavoidable, it comes from the ill-posedness of the inverse problem. We mitigate it by reducing the dimension q of the reduced model depending on the noise level. In practice we need to compute a Padé approximant of the Laplace transform of $d(t)$ in order to obtain $\mathcal{Q}(d(t))$. The approximant must use the same matching conditions as the model reduction scheme used to compute $\mathcal{Q}(y(\cdot; \mathbf{r}))$. The details of the computation of $\mathcal{Q}(d(t))$ are given in section 4.3.

4. Matching conditions for inversion. Obviously, a good nonlinear preconditioner $\mathcal{Q}$ should be an approximation of the identity on some space. Moreover, to have a good reconstruction of $r(x)$, the continued fraction coefficients must correspond to the values of the resistivity at spread out locations in the domain $[0, 1]$. In this section we study how this property depends on the matching conditions (3.5).

A good measure of how close $\mathcal{Q}$ is to the identity is the condition number of the Jacobian of $\mathcal{Q}$ with respect to $\mathbf{r}$, denoted hereafter by $\mathcal{D}\mathcal{Q} \in \mathbb{R}^{2m \times N}$. It is defined by

$$(\mathcal{D}\mathcal{Q})_{j,k} = \begin{cases} \frac{\partial \kappa_j}{\partial r_k}, & \text{if } 1 \leq j \leq m \\ \frac{\partial \widehat{\kappa}_j}{\partial r_k}, & \text{if } m+1 \leq j \leq 2m \end{cases}, \quad k = 1, \dots, N.$$

The computation of $\mathcal{D}\mathcal{Q}$ requires differentiation of all the mappings in (3.13), and follows from the chain rule. We describe it in detail in section 5.

4.1. Connection to optimal grids and sensitivity functions. Our inversion method is based on ideas developed for the inverse spectral problem in [4] and for Electrical Impedance Tomography in [3, 5, 6, 21]. They use the concept of *optimal grids* that was originally introduced in [2, 8, 9, 19] to obtain exponential superconvergence of approximations of the Dirichlet-to-Neumann and Neumann-to-Dirichlet maps. While the method proposed here is not directly based on the use of optimal grids, it is beneficial to study them nevertheless, since they provide insight into the behavior of the nonlinear preconditioner (3.13). Good choices of matching conditions for step (b) of (3.13) give good distributions of the grid nodes, and therefore good reconstructions of $r(x)$ throughout the domain.

The optimal grids are usually defined by the coefficients of the continued fraction corresponding to a reference constant resistivity $r^{(0)}$. In principle we can define grids for another reference resistivity, not necessarily constant. But the results in [3, 4, 5, 6, 21] show that the grids change very little with respect to the reference $r^{(0)}$. This property makes them very useful in inversion.

Let then $r^{(0)}(x) \equiv 1$ and note from (3.11)-(3.12) that

$$(\kappa_j^{(0)}, \hat{\kappa}_j^{(0)})_{j=1}^m = \mathcal{Q}(y(\cdot, \mathbf{r}^{(0)})), \quad \mathbf{r}^{(0)} = (1, 1, \dots, 1)^T,$$

are grid steps in a finite difference scheme for the equation

$$\frac{\partial^2 w}{\partial x^2} - sw = 0.$$

The primary and dual grid points are

$$(4.1) \quad x_j^{(0)} = \sum_{k=1}^j \kappa_k^{(0)}, \quad \hat{x}_j^{(0)} = \sum_{k=1}^j \hat{\kappa}_k^{(0)}, \quad j = 1, \dots, m,$$

with boundary nodes $x_0^{(0)} = \hat{x}_0^{(0)} = 0$. In the numerical experiments we observe that the grid is staggered, i.e. the *primary* nodes $x_j^{(0)}$ and the *dual* nodes $\hat{x}_j^{(0)}$ obey interlacing conditions (4.2)

$$0 = \hat{x}_0^{(0)} = x_0^{(0)} < \hat{x}_1^{(0)} < x_1^{(0)} < \hat{x}_2^{(0)} < x_2^{(0)} < \dots < \hat{x}_{m-1}^{(0)} < x_{m-1}^{(0)} < \hat{x}_m^{(0)} < x_m^{(0)} \leq 1.$$

We do not prove (4.2) here, although it is possible to do so at least in some settings [5].

The optimal grids are closely connected with the *sensitivity functions*, which are given in our semi-discrete setting by the rows of the Jacobian $\mathcal{DQ}$. The studies in [3, 6, 17, 21] show that the sensitivity function corresponding to κ_j is localized around the corresponding grid cell $(\hat{x}_j^{(0)}, \hat{x}_{j+1}^{(0)})$, and its maximum is near $x_j^{(0)}$. The same holds for $\hat{\kappa}_j$, after interchanging the primary and dual grid nodes. Moreover, the columns of the pseudoinverse $(\mathcal{DQ})^\dagger$ have similar localization behavior. The Gauss-Newton update is the linear combination of the columns of $(\mathcal{DQ})^\dagger$, so optimal grids are appropriate for inversion. They localize well features of the resistivity that are recoverable from the measurements.

4.2. Optimal grids for different matching conditions. We expect a good grid to have two properties. First, the grid nodes should not be clustered. If two nodes get too close then the corresponding rows of $\mathcal{DQ}$ become almost linearly dependent, and the Jacobian is ill-conditioned. In practice the nodes that tend to get closer are $x_1^{(0)} = \kappa_1^{(0)}$ and $\hat{x}_1^{(0)} = \hat{\kappa}_1^{(0)}$. Second, the optimal grids should be refined near the measurement location to capture correctly the loss of resolution away from the boundary. But to have a good reconstruction throughout the domain, the nodes should not all be clustered at the boundary.

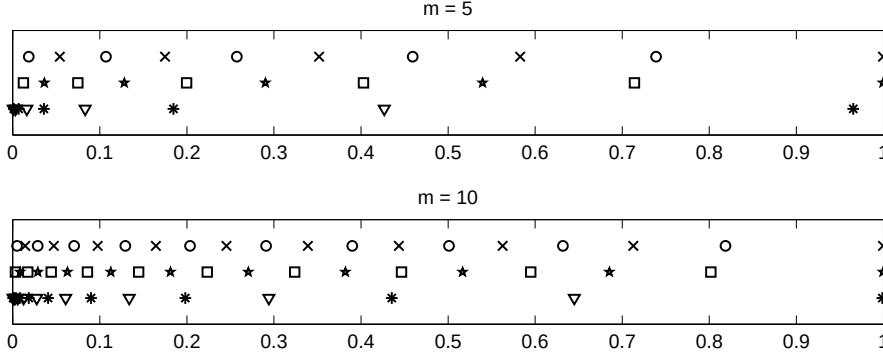


FIG. 4.1. Primary $x_j^{(0)}$ and dual $\hat{x}_j^{(0)}$ optimal grid nodes for $j = 1, \dots, m$ ($m = 5, 10$) and different choices of matching conditions. Moment matching at $s = 0$: primary $\times$, dual $\circ$. Interpolation at geometrically distributed interpolation nodes: primary $\star$ and dual $\square$ for slowly growing $\tilde{\sigma}$; primary $\star$ and dual ∇ for fast growing $\tilde{\sigma}$. The number of fine grid steps in the semi-discretized model is $N = 1999$.

Let us illustrate the grids for three choices of matching conditions (3.5). The first choice (simple Padé) corresponds to $l = 1$, $\sigma_1 = 0$ and $M_1 = m$ and yields the rational Krylov subspace

$$\mathcal{K}_m(0) = \text{span} \{A^{-1}\mathbf{b}, A^{-2}\mathbf{b}, \dots, A^{-m}\mathbf{b}\}.$$

The simple Padé approximant has the best accuracy near the expansion point ($s = 0$), and obviously will be inferior for global approximation compared to properly chosen multipoint Padé approximants.

The second and third choices match $G(s; \mathbf{r})$ and its first derivative at the nodes $\tilde{\sigma} = (\tilde{\sigma}_j)_{j=1}^m$ distributed geometrically

$$(4.3) \quad \tilde{\sigma}_j = \tilde{\sigma}_1 \left(\frac{\tilde{\sigma}_2}{\tilde{\sigma}_1} \right)^{j-1}, \quad j = 1, \dots, m,$$

which yields the rational Krylov subspace

$$\mathcal{K}_m(\tilde{\sigma}) = \text{span} \{(\tilde{\sigma}_1 I - A)^{-1}\mathbf{b}, \dots, (\tilde{\sigma}_m I - A)^{-1}\mathbf{b}\}.$$

We use a slower rate of growth for the second choice and a faster rate for the third choice. The slower rate corresponds to the optimal geometric progression [19] approximating Zolotarev nodes, which in turn give an optimal approximant based on the spectral interval of $A(\mathbf{r})$. We expect the slower rate to give the best results between all three choices, which is confirmed in the numerical experiment below.

We show the optimal grids for all three choices of matching conditions in Figure 4.1 for reduced models of sizes $m = 5, 10$. We observe that the nodes of the grids corresponding to fast growing $\tilde{\sigma}$ are clustered too close to the measurement point $x = 0$. Thus, inversion results based on matching conditions with fast growing interpolation nodes are expected to have poor resolution throughout the rest of the domain away from the origin.

The clustering of grid nodes around the origin also leads to poor conditioning of the Jacobian $\mathcal{D}\mathcal{Q}$. This is illustrated in Figure 4.2, where the condition numbers are plotted against the size m of the reduced model. We observe that the condition number of the Jacobian for the reduced model with fast growing $\tilde{\sigma}$ increases exponentially. The condition numbers of the Jacobians for the other two choices of matching conditions grow very slowly.

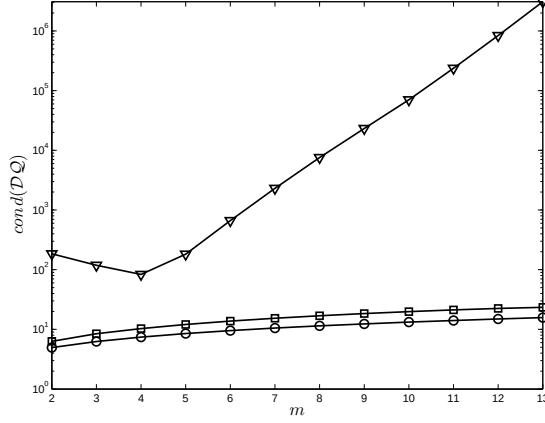


FIG. 4.2. Dependence of the condition number of $\mathcal{DQ}$ on the size m of the reduced model for different choices of matching conditions. Moment matching at $s = 0$ is $\circ$, interpolation at geometrically distributed nodes: slowly growing $\tilde{\sigma}$ is $\square$, fast growing $\tilde{\sigma}$ is ∇ . The number of fine grid steps in the semi-discretized model is $N = 1999$.

We can explain the poor performance in case of fast growing interpolation nodes if we view it as being close to the limiting case of having an approximation at infinity. Simple Padé approximant at infinity corresponds to Krylov subspace

$$\mathcal{K}_m(+\infty) = \text{span} \{ \mathbf{b}, A\mathbf{b}, \dots, A^{m-1}\mathbf{b} \}$$

which is unsuitable for inversion in our setting. To see this, recall from (2.2) that $A(\mathbf{r})$ is tridiagonal and $\mathbf{b}$ is along $\mathbf{e}_1$. Thus, for any $j \in \mathbb{Z}_+$ only the first $j + 1$ components of the vector $A^j \mathbf{b}$ are non-zero. When $A(\mathbf{r})$ is projected on $\mathcal{K}_m(+\infty)$ in (3.4), the reduced model matrix A_m is aware only of the upper left $(m + 1) \times (m + 1)$ block of $A(\mathbf{r})$, which depends only on the first $m + 1$ entries of $\mathbf{r}$. This is unsuitable for inversion where we want A_m to capture the behavior of the resistivity in the whole interval, even for small m . The corresponding optimal grid steps will simply coincide with the first m grid steps h of the fine grid discretization in (2.2).

If the interpolation nodes grow too quickly, we approach the limiting case of simple Padé at infinity, and thus for the first optimal grid steps we have

$$(4.4) \quad \hat{x}_1^{(0)} \approx x_1^{(0)} \approx h.$$

This causes the rows $\left(\frac{\partial \kappa_1}{\partial r_k} \right)_{k=1}^N$ and $\left(\frac{\partial \hat{\kappa}_1}{\partial r_k} \right)_{k=1}^N$ of $\mathcal{DQ}$ to be almost collinear, and thus the poor conditioning of the Jacobian observed in Figure 4.2.

The geometrical distribution that we find to work particularly well in our setting is

$$(4.5) \quad \tilde{\sigma}_j = \tilde{\sigma}_1 \left(1 + \frac{C}{m} \right)^{j-1}, \quad j = 1, \dots, m,$$

where we take $\tilde{\sigma}_1 = 2$ and $C = 12$.

4.3. Osculatory rational interpolation problem. Solving the inverse resistivity problem via (2.6) requires computing

$$(4.6) \quad (\kappa_j, \hat{\kappa}_j)_{j=1}^m = \mathcal{Q}(d(\cdot)).$$

This is the ill-conditioned step of the inversion method. It comes from the ill-posedness of the inverse problem and we mitigate it by limiting m . In practice we choose m so that the resulting κ_j and $\hat{\kappa}_j$ are positive.

Unlike $\mathcal{Q}(y(\cdot; \mathbf{r}))$ which can be computed using the chain of mappings (3.13), the computation of $\mathcal{Q}(d(\cdot))$ requires solving an osculatory rational interpolation problem. This involves the solution of a linear system of equations with an ill-conditioned matrix, or taking a singular value decomposition of such a matrix. We use the condition number of the matrix to assess the instability of the problem. The condition number grows exponentially with m , but the rate of growth depends on the matching conditions used in the rational interpolation. In this section we study the two choices of matching conditions: (1) interpolation of $G(s; \mathbf{r})$ and its first derivatives at distinct nodes $\tilde{\sigma}$ distributed as in (4.5) (multipoint Padé approximation), and (2) matching of moments of $G(s; \mathbf{r})$ at $s = 0$ (simple Padé approximation).

4.3.1. Multipoint Padé approximation. Let us write the reduced order transfer function as a ratio

$$(4.7) \quad G_m(s) = \frac{p(s)}{q(s)} = \frac{p_0 + p_1 s + \dots + p_{m-1} s^{m-1}}{q_0 + q_1 s + \dots + q_m s^m}.$$

Note that there is redundancy in the definition (4.7), since the coefficients of p and q may be multiplied by a common factor. This redundancy is used later to choose a unique solution of an underdetermined problem.

We rewrite the matching conditions (3.5) of $G(s)$ and $G'(s)$ at the distinct interpolation nodes $0 < \tilde{\sigma}_1 < \tilde{\sigma}_2 < \dots < \tilde{\sigma}_m$ as

$$(4.8) \quad \begin{cases} p(\tilde{\sigma}_j) - G_m(\tilde{\sigma}_j)q(\tilde{\sigma}_j) = 0 \\ p'(\tilde{\sigma}_j) - G'_m(\tilde{\sigma}_j)q(\tilde{\sigma}_j) - G_m(\tilde{\sigma}_j)q'(\tilde{\sigma}_j) = 0 \end{cases}, \quad j = 1, \dots, m.$$

We can improve the conditioning of the interpolation by introducing the change of variables

$$(4.9) \quad \sigma_j = \frac{\tilde{\sigma}_j}{\tilde{\sigma}_m} \in (0, 1].$$

Let us define the Vandermonde-like $m \times (m+1)$ matrices

$$(4.10) \quad \Sigma = \begin{bmatrix} 1 & \sigma_1 & \sigma_1^2 & \dots & \sigma_1^m \\ 1 & \sigma_2 & \sigma_2^2 & \dots & \sigma_2^m \\ \vdots & \vdots & \vdots & \vdots & \vdots \\ 1 & \sigma_m & \sigma_m^2 & \dots & \sigma_m^m \end{bmatrix}, \quad \Sigma' = \frac{1}{\tilde{\sigma}_m} \begin{bmatrix} 0 & 1 & 2\sigma_1 & \dots & m\sigma_1^{m-1} \\ 0 & 1 & 2\sigma_2 & \dots & m\sigma_2^{m-1} \\ \vdots & \vdots & \vdots & \vdots & \vdots \\ 0 & 1 & 2\sigma_m & \dots & m\sigma_m^{m-1} \end{bmatrix},$$

and the diagonal matrices

$$(4.11) \quad F = \text{diag}(G(\tilde{\sigma}_1), G(\tilde{\sigma}_2), \dots, G(\tilde{\sigma}_m)), \quad F' = \text{diag}(G'(\tilde{\sigma}_1), G'(\tilde{\sigma}_2), \dots, G'(\tilde{\sigma}_m)).$$

Equations (4.8) can be written in matrix-vector form as an underdetermined problem

$$(4.12) \quad R_m \mathbf{w} = 0, \quad \mathbf{w} \in \mathbb{R}^{2m+1},$$

where

$$(4.13) \quad R_m = \begin{bmatrix} \Sigma_{1:m, 1:m} & -F\Sigma \\ \Sigma'_{1:m, 1:m} & -F'\Sigma - F\Sigma' \end{bmatrix} \in \mathbb{R}^{2m \times (2m+1)},$$

and

$$(4.14) \quad p_j = \tilde{\sigma}_m^{-j} w_{j+1}, \quad j = 0, \dots, m-1,$$

$$(4.15) \quad q_j = \tilde{\sigma}_m^{-j} w_{j+m+1}, \quad j = 0, \dots, m.$$

In (4.13) we use Matlab notation to pick the first m rows and columns of Σ and Σ' . The problem is underdetermined because of the redundancy in (4.7). We eliminate it by the additional condition $\|\mathbf{w}\|_2 = 1$, which makes it possible to solve (4.12) via the singular value decomposition

$$(4.16) \quad R_m = U S W^T, \quad \mathbf{w} = W_{1:(2m+1), 2m+1}.$$

Once the polynomials p and q are determined from (4.14)-(4.15), we can compute the partial fraction expansion (3.6). The poles $-\theta_j$ are the roots of $q(s)$, and the residues c_j are given by

$$c_j = \frac{p(-\theta_j)}{q_m \prod_{\substack{k=1 \\ k \neq j}}^m (\theta_k - \theta_j)}, \quad j = 1, \dots, m,$$

assuming that θ_j are distinct. Finally, κ_j and $\hat{\kappa}_j$ are obtained from θ_j and c_j via a Lanczos iteration, as explained in section 5.

4.3.2. Simple Padé approximation. When $l = 1$, $\sigma_1 = 0$ and $M_1 = m$, we have a simple Padé approximant which matches the first $2m$ moments of $y(t; \mathbf{r})$ in the time domain, because

$$\left. \frac{\partial^j G_m}{\partial s^j} \right|_{s=0} = \left. \frac{\partial^j G}{\partial s^j} \right|_{s=0} = (-1)^j \int_0^{+\infty} y(t; \mathbf{r}) t^j dt, \quad j = 0, 1, \dots, 2m-1.$$

A robust algorithm for simple Padé approximation is proposed in [16]. It is also based on the singular value decomposition. If $G(s)$ has the Taylor expansion at $s = 0$

$$(4.17) \quad G(s) = \tau_0 + \tau_1 s + \tau_2 s^2 + \dots + \tau_{2m-1} s^{2m-1} + \dots,$$

then the algorithm in [16] performs a singular value decomposition of the Toeplitz matrix

$$(4.18) \quad T_m = \begin{bmatrix} \tau_m & \tau_{m-1} & \cdots & \tau_1 & \tau_0 \\ \tau_{m+1} & \tau_m & \cdots & \tau_2 & \tau_1 \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ \tau_{2m-1} & \tau_{2m-2} & \cdots & \tau_m & \tau_{m-1} \end{bmatrix} \in \mathbb{R}^{m \times (m+1)}.$$

If $T_m = U S W^T$, then the coefficients of the denominator and numerator of (4.7) satisfy

$$(4.19) \quad \begin{pmatrix} q_0 \\ q_1 \\ \vdots \\ q_m \end{pmatrix} = W_{1:(m+1), m+1}, \quad \text{and} \quad \begin{pmatrix} p_0 \\ p_1 \\ \vdots \\ p_{m-1} \end{pmatrix} = \begin{bmatrix} \tau_0 & 0 & \cdots & 0 & 0 \\ \tau_1 & \tau_0 & \cdots & 0 & 0 \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ \tau_{m-1} & \tau_{m-2} & \cdots & \tau_0 & 0 \end{bmatrix} \begin{pmatrix} q_0 \\ q_1 \\ \vdots \\ q_m \end{pmatrix}.$$

We refer the reader to [16] for detailed explanations.

4.3.3. Comparison of simple and multipoint Padé approximants. To compare the performance of the osculatory interpolation procedure in section 4.3.1 to that of the simple Padé approximation algorithm in section 4.3.2, we compare the condition numbers of the matrices R_m and T_m . They are computed for the reference resistivity $\mathbf{r}^{(0)}$, for several values of the size m of the reduced model. The results are in Table 4.1. We observe that while both condition numbers display exponential growth, the growth rate is slower for the multipoint Padé approximant. Thus, we conclude that it is the best of the choices of matching conditions considered in this section. It allows a more stable computation of $\mathcal{Q}(d(\cdot))$, it gives a good distribution of the optimal grid points and a well-conditioned Jacobian $\mathcal{D}\mathcal{Q}(y(\cdot; \mathbf{r}))$.

TABLE 4.1

Condition numbers of R_m (multipoint Padé approximant) and T_m (simple Padé approximant). The number of fine grid steps in the semi-discretized model is $N = 299$.

m	2	3	4	5	6
$\text{cond}(R_m)$	$4.43 \cdot 10^2$	$6.73 \cdot 10^4$	$1.85 \cdot 10^7$	$6.95 \cdot 10^9$	$3.83 \cdot 10^{12}$
$\text{cond}(T_m)$	$5.28 \cdot 10^1$	$1.26 \cdot 10^5$	$1.84 \cdot 10^9$	$9.14 \cdot 10^{13}$	$2.86 \cdot 10^{16}$

5. Nonlinear preconditioner and its Jacobian. The computation of the nonlinear preconditioner $\mathcal{Q}(y(\cdot; \mathbf{r}))$ and its Jacobian is the most complex and time consuming computation in our inversion scheme. Nevertheless, it is much more efficient than the traditional inversion approach because it avoids the repeated computation of the time domain solution of the forward problem. In this section we explain the details of the computation of $\mathcal{Q}$ and $\mathcal{D}\mathcal{Q}$ via the chain of mappings (3.13). We do so only for the multipoint Padé approximant, which we showed above to be best suited for inversion.

(a) The matrix A is defined by (2.2) for a given $\mathbf{r}$. Differentiating (2.2) yields

$$(5.1) \quad \frac{\partial A}{\partial r_k} = -D^T \mathbf{e}_k \mathbf{e}_k^T D = -\mathbf{d}_k \mathbf{d}_k^T, \quad k = 1, \dots, N,$$

with $\mathbf{d}_k = D_{k, 1:N}^T$. This is a rank one matrix.

(b) At this step we need to differentiate the orthonormal basis V of the Krylov subspace $\mathcal{K}_m(\tilde{\sigma})$. There are different ways of computing an orthonormal basis of $\mathcal{K}_m(\tilde{\sigma})$. One choice is to use a rational Lanczos algorithm [15]. While this may be a more stable way of computing V compared to other approaches, differentiation formulas are difficult to derive and implement. We consider an alternative approach, based on the differentiation of the QR decomposition.

We compute first the matrix

$$(5.2) \quad K = [(\tilde{\sigma}_1 I - A)^{-1} \mathbf{b}, \dots, (\tilde{\sigma}_m I - A)^{-1} \mathbf{b}] \in \mathbb{R}^{N \times m},$$

and its derivatives

$$(5.3) \quad \frac{\partial K}{\partial r_k} = -[(\tilde{\sigma}_1 I - A)^{-1} \mathbf{d}_k [(\tilde{\sigma}_1 I - A)^{-1} \mathbf{d}_k]^T \mathbf{b}, \dots, (\tilde{\sigma}_m I - A)^{-1} \mathbf{d}_k [(\tilde{\sigma}_m I - A)^{-1} \mathbf{d}_k]^T \mathbf{b}].$$

Then V can be defined via the QR decomposition of K , which we write as

$$(5.4) \quad K = VR,$$

where $V \in \mathbb{R}^{N \times m}$, $V^T V = I_m \in \mathbb{R}^{m \times m}$, and $R \in \mathbb{R}^{m \times m}$ is upper triangular. If we denote $L = R^T$, then (5.4) implies

$$(5.5) \quad K^T K = LL^T.$$

That is to say R^T is a Cholesky factor of $K^T K$. At the same time, when we differentiate (5.4), we obtain

$$(5.6) \quad \frac{\partial V}{\partial r_k} = \left(\frac{\partial K}{\partial r_k} - V \frac{\partial R}{\partial r_k} \right) R^{-1}, \quad k = 1, \dots, N.$$

Since we already know $\partial K / \partial r_k$ from (5.3), in order to differentiate the mapping (b)–(c), we need to compute the derivative $\partial R / \partial r_k$ of the Cholesky factorization of $K^T K$. This is given in the following proposition.

PROPOSITION 5.1 (Differentiation of Cholesky factorization). *Let $M \in \mathbb{R}^{m \times m}$ be a matrix with Cholesky factorization $M = LL^T$. Given the perturbation δM of M , the corresponding perturbation δL of the Cholesky factor is computed by the following algorithm.*

For $k = 1, \dots, m$

$$\delta L_{kk} = \frac{1}{L_{kk}} \left(\frac{\delta M_{kk}}{2} - \sum_{j=1}^{k-1} \delta L_{kj} L_{kj} \right).$$

For $i = k + 1, \dots, m$

$$\delta L_{ik} = \frac{1}{L_{kk}} \left(\delta M_{ik} - \sum_{j=1}^k \delta L_{kj} L_{ij} - \sum_{j=1}^{k-1} \delta L_{ij} L_{kj} \right).$$

Proof. The above formulas can be verified by direct computation if we write

$$(5.7) \quad \delta M = (\delta L) L^T + L (\delta L)^T$$

and solve for the columns of δL , one a time, using that δL is lower triangular. $\square$

We use Proposition 5.1 for $M = K^T K$, with perturbation

$$\delta M = \frac{\partial M}{\partial r_k} \delta r_k, \quad \frac{\partial M}{\partial r_k} = \left(\frac{\partial K}{\partial r_k} \right)^T K + K^T \left(\frac{\partial K}{\partial r_k} \right),$$

to obtain

$$\delta L = \frac{\partial L}{\partial r_k} \delta r_k \quad \text{and} \quad \frac{\partial R}{\partial r_k} = \left(\frac{\partial L}{\partial r_k} \right)^T.$$

The computation of $\partial V / \partial r_k$ follows from (5.6).

(c) Once we have V and its derivatives we compute

$$(5.8) \quad \frac{\partial A_m}{\partial r_k} = -V^T \mathbf{d}_k \mathbf{d}_k^T V + \frac{\partial V}{\partial r_k}^T A V + V^T A \frac{\partial V}{\partial r_k},$$

$$(5.9) \quad \frac{\partial \mathbf{b}_m}{\partial r_k} = \frac{\partial V}{\partial r_k}^T \mathbf{b}.$$

(d)–(e) There are two possible ways to go from the reduced model $A_m, \mathbf{b}_m$ to the continued fraction coefficients $\kappa_j, \hat{\kappa}_j$. Both approaches use a Lanczos iteration to obtain a symmetric tridiagonal matrix, which we denote by

$$(5.10) \quad T = \begin{bmatrix} \alpha_1 & \beta_2 & & & \\ \beta_2 & \alpha_2 & \ddots & & \\ & \ddots & \ddots & \ddots & \\ & & \ddots & \ddots & \beta_m \\ & & & \beta_m & \alpha_m \end{bmatrix}.$$

For a symmetric matrix E we compute T and the columns $\mathbf{x}_j$ of a unitary matrix X via a Lanczos iteration with full reorthogonalization. Since the dimension m of the problem is small, we reorthogonalize at every step to ensure maximum numerical stability. The specific matrices E , X , and the initial vector $\boldsymbol{\eta}$ depend on which approach we consider. The iteration is as follows:

$$\begin{aligned} & \text{Initialize } \mathbf{x}_1 = \boldsymbol{\eta}, \mathbf{x}_0 = 0, \beta_1 = 0. \\ & \text{For } j = 1, \dots, m-1 \\ & \quad \alpha_j = \mathbf{x}_j^T E \mathbf{x}_j, \\ & \quad \tilde{\mathbf{w}}_{j+1} = E \mathbf{x}_j - \alpha_j \mathbf{x}_j - \beta_j \mathbf{x}_{j-1}, \\ & \quad \mathbf{w}_{j+1} = (I - X_{1:N, 1:j} (X_{1:N, 1:j})^T) \tilde{\mathbf{w}}_{j+1}, \\ & \quad \beta_{j+1} = \|\mathbf{w}_{j+1}\|, \\ & \quad \mathbf{x}_{j+1} = \frac{\mathbf{w}_{j+1}}{\beta_{j+1}}. \\ & \alpha_m = \mathbf{x}_m^T E \mathbf{x}_m. \end{aligned}$$

The first approach is to compute the matrix T that is unitarily similar to the reduced model matrix A_m , i.e.

$$(5.11) \quad T = Y^T A_m Y, \quad Y^T Y = I.$$

Thus, in the Lanczos iteration above we take $E = A_m$, $X = Y$ and the initial vector $\boldsymbol{\eta} = \mathbf{b}_m / \|\mathbf{b}_m\|$. This allows us to combine steps (e) and (d) and thus go from the reduced model A_m , $\mathbf{b}_m$ directly to the tridiagonal matrix T .

The second approach is to compute first the eigenvalue decomposition (3.7) of A_m to get the poles $-\theta_j$ and the residues c_j , for $j = 1, \dots, m$. Then take

$$(5.12) \quad T = Q \Theta Q^T, \quad Q^T Q = Q Q^T = I,$$

where $\Theta = -\text{diag}(\theta_1, \dots, \theta_m)$. In the Lanczos iteration we have $E = \Theta$ and $\mathbf{x}_j$ are the transposed rows of Q , i.e. $X = Q^T$. The entries of the initial vector are given by

$$(5.13) \quad \eta_i = \sqrt{\frac{c_i}{\sum_{s=1}^m c_s}}, \quad i = 1, \dots, m.$$

From the computed T with either of the two approaches, we obtain the coefficients of the continued fraction using the formulas from [8].

$$(5.14) \quad \hat{\kappa}_1 = \frac{1}{\sum_{s=1}^m c_s}, \quad \kappa_1 = -\frac{1}{\hat{\kappa}_1 \alpha_1},$$

$$(5.15) \quad \hat{\kappa}_j = \frac{1}{\kappa_{j-1}^2 \beta_{j-1}^2 \hat{\kappa}_{j-1}}, \quad j = 2, \dots, m,$$

$$(5.16) \quad \kappa_j = -\frac{1}{\alpha_j \hat{\kappa}_j + \frac{1}{\kappa_{j-1}}}, \quad j = 2, \dots, m.$$

In order to differentiate the mappings (d) and (e), we need to differentiate the Lanczos iteration. In general, there is no explicit formula for the perturbations of the entries of T in terms of perturbations of E and $\boldsymbol{\eta}$. Thus, we would need to differentiate the Lanczos iteration directly, with an algorithm that computes the perturbations of α_j , β_j and $\mathbf{x}_j$ iteratively, for increasing j . However, for the second approach we can use the explicit perturbation formulas

for the Lanczos iteration derived in [4]. To apply these formulas, we need to differentiate the steps (d) and (e) separately.

The differentiation of (d) follows directly from the differentiation of the eigendecomposition (3.7) of A_m . It is given by

$$(5.17) \quad \frac{\partial \theta_j}{\partial r_k} = -\mathbf{z}_j \frac{\partial A_m}{\partial r_k} \mathbf{z}_j,$$

$$(5.18) \quad \frac{\partial \mathbf{z}_j}{\partial r_k} = -(A_m + \theta_j I)^\dagger \frac{\partial A_m}{\partial r_k} \mathbf{z}_j,$$

$$(5.19) \quad \frac{\partial c_j}{\partial r_k} = 2(\mathbf{b}_m^T \mathbf{z}_j) \left(\mathbf{b}^T \frac{\partial V}{\partial r_k} \mathbf{z}_j + \mathbf{b}_m^T \frac{\partial \mathbf{z}_j}{\partial r_k} \right),$$

where $\dagger$ denotes the pseudoinverse.

For the computation of the derivatives in step (e) we use the explicit formulas from [4], for $E = \Theta$ and $X = Q^T$ and $\boldsymbol{\eta}$ given by (5.13). Let us define the vectors

$$(5.20) \quad \boldsymbol{\delta}_\alpha = \begin{pmatrix} \delta\alpha_1 \\ \delta\alpha_1 + \delta\alpha_2 \\ \vdots \\ \sum_{j=1}^m \delta\alpha_j \end{pmatrix}, \quad \boldsymbol{\delta}_\beta = \begin{pmatrix} \delta\beta_1/\beta_1 \\ \delta\beta_1/\beta_1 + \delta\beta_2/\beta_2 \\ \vdots \\ \sum_{j=1}^m \delta\beta_j/\beta_j \end{pmatrix}.$$

They can be expressed in terms of the perturbations of the poles $\boldsymbol{\theta} = (\theta_1, \dots, \theta_m)^T$ and the initial vector $\boldsymbol{\eta}$ as

$$(5.21) \quad \boldsymbol{\delta}_\alpha = -A_\theta \delta\boldsymbol{\theta} + A_\eta \delta\boldsymbol{\eta},$$

$$(5.22) \quad \boldsymbol{\delta}_\beta = -B_\theta \delta\boldsymbol{\theta} + B_\eta \delta\boldsymbol{\eta}.$$

Here $A_\theta, A_\eta \in \mathbb{R}^{m \times m}$ are the matrices with entries

$$(5.23) \quad A_\theta^{ij} = 1 + \beta_i \sum_{\substack{p=1 \\ p \neq j}}^m \frac{1}{\theta_p - \theta_j} \left[2Q_{ip}Q_{i+1,p} - \frac{Q_{1p}}{Q_{1j}}(Q_{ip}Q_{i+1,j} - Q_{i+1,p}Q_{ij}) \right],$$

$$(5.24) \quad A_\eta^{ij} = 2\beta_i \frac{Q_{i+1,j}Q_{ij}}{Q_{1j}}, \quad A_\eta^{mj} = 0, \quad A_\theta^{mj} = 1,$$

for $i = 1, \dots, m-1, j = 1, \dots, m$ and the entries of $B_\theta, B_\eta \in \mathbb{R}^{(m-1) \times m}$ are

$$(5.25) \quad B_\theta^{ij} = \sum_{\substack{p=1 \\ p \neq j}}^m \frac{1}{\theta_p - \theta_j} \left[(Q_{i+1,p})^2 - \frac{Q_{1p}}{Q_{1j}} Q_{i+1,p} Q_{i+1,j} \right],$$

$$(5.26) \quad B_\eta^{ij} = \frac{(Q_{i+1,j})^2}{Q_{1j}},$$

for $i = 1, \dots, m-1$ and $j = 1, \dots, m$.

Note that the computation of $\delta\boldsymbol{\eta}$ can be done by differentiating (5.13) and using (5.19). Once the vectors $\boldsymbol{\delta}_\alpha$ and $\boldsymbol{\delta}_\beta$ are known, it is trivial to obtain the individual perturbations $\delta\alpha_j$ and $\delta\beta_j$. Finally, from those perturbations we compute the derivatives of κ_j and $\hat{\kappa}_j$ by differentiating relations (5.14)–(5.16). The computation is straightforward and we do not include it here.

6. Inversion algorithm and numerical results. We solve the optimization problem (2.6) with a Gauss-Newton iteration. Recall that the Jacobian $\mathcal{D}\mathcal{Q}$ is a matrix in $\mathbb{R}^{2m \times N}$. The Gauss-Newton iteration updates of the estimated resistivity are in the range of $(\mathcal{D}\mathcal{Q})^\dagger$ which has dimension $2m$. This leads to low resolution in practice, because m is kept small to mitigate the sensitivity of the inverse problem to noise. If we have prior information about the unknown $\mathbf{r}^{\text{true}}$, we can use it to improve its estimate $\mathbf{r}^*$. The prior information is in the regularization term $\mathcal{P}(\mathbf{r})$.

In our inversion algorithm we do the data fitting and the regularization separately. At each step of the Gauss-Newton iteration we compute first the update of $\mathbf{r}$. Then we add to it corrections in the null space of $\mathcal{D}\mathcal{Q}$, which ensures that they do not affect the residual. These corrections are chosen to minimize the regularization functional. To allow explicit computation of the regularization correction, we use henceforth a weighted discrete H^1 seminorm regularization functional

$$(6.1) \quad \mathcal{P}(\mathbf{r}) = \frac{1}{2} \|W^{1/2} \Delta \mathbf{r}\|_2^2.$$

Here Δ is a matrix, the truncation of D , defined by

$$\Delta = D_{1:(N-1), 1:N} \in \mathbb{R}^{(N-1) \times N},$$

and $W \in \mathbb{R}^{(N-1) \times (N-1)}$ is a diagonal matrix of weights. We specify it later depending on the prior information on the true resistivity.

Let $\mathbf{r}$ be the current Gauss-Newton iterate then the regularized iterate $\boldsymbol{\rho}$ is chosen so that the correction $(\mathbf{r} - \boldsymbol{\rho})$ lies in the null space of $\mathcal{D}\mathcal{Q}$ and $\mathcal{P}(\boldsymbol{\rho})$ is minimized. This can be achieved by solving the constrained optimization problem

$$(6.2) \quad \begin{aligned} & \text{minimize} && \boldsymbol{\rho}^T \Delta^T W \Delta \boldsymbol{\rho} \\ & \text{s.t. } [\mathcal{D}\mathcal{Q}](\mathbf{r} - \boldsymbol{\rho}) = 0 \end{aligned}$$

Since (6.2) is quadratic with linear constraints, we get $\boldsymbol{\rho}$ from the first order optimality conditions given by the linear system

$$(6.3) \quad \Delta^T W \Delta \boldsymbol{\rho} + [\mathcal{D}\mathcal{Q}]^T \boldsymbol{\lambda} = 0,$$

$$(6.4) \quad [\mathcal{D}\mathcal{Q}] \boldsymbol{\rho} = [\mathcal{D}\mathcal{Q}] \mathbf{r},$$

where $\boldsymbol{\lambda} \in \mathbb{R}^{2m}$ is a vector of Lagrange multipliers.

In the numerical results presented in section 6.3 we consider smooth and piecewise constant resistivities, and choose W in (6.1) accordingly. For smooth resistivities we simply take $W = I$, so that (6.1) is a regular discrete H^1 seminorm. For discontinuous resistivities we would like to minimize the total variation of the resistivity. This does not allow an explicit computation of $\boldsymbol{\rho}$, so we make a compromise and use the weights introduced in [1]. The matrix W is diagonal with entries

$$(6.5) \quad w_j = (([\Delta \mathbf{r}]_j)^2 + \phi(\mathbf{r})^2)^{-1}, \quad j = 1, \dots, N-1,$$

where $\phi(\mathbf{r})$ is proportional to the misfit for the current iterate

$$(6.6) \quad \phi(\mathbf{r}) = C_\phi \|Q(d(\cdot)) - Q(y(\cdot; \mathbf{r}))\|_2,$$

and C_ϕ is some constant, which we set to $1/(2m^2)$ in the numerical examples below.

To ensure that $A(\mathbf{r})$ corresponds to a discretization of an elliptic operator, we need positive entries in $\mathbf{r}$. This can be done with a logarithmic change of coordinates, which transforms

the optimization problem to an unconstrained one. However, in our numerical experiments we observed that if m is sufficiently small so that for the given data $d(\cdot)$ all the entries of $\mathcal{Q}(d(\cdot)) \in \mathbb{R}^{2m}$ are positive, then the Gauss-Newton updates of $\mathbf{r}$ remain positive as well. Thus, the logarithmic change of coordinates for $\mathbf{r}$ has not been needed in our computations.

We use another logarithmic change of coordinates, to obtain a better scaling of the problem and improve the quality of the reconstructions. Namely, we work with the logarithm of the continued fraction coefficients κ_j and $\hat{\kappa}_j$.

6.1. The inversion algorithm. The inputs of the inversion algorithm are the measured data $d(t)$ and a guess value of m . This m reflects the expected resolution of the reconstruction, and may need to be decreased depending on the noise level. To compute the estimate $\mathbf{r}^*$ of $\mathbf{r}^{\text{true}}$, perform the following steps:

1. Define the interpolation nodes $\tilde{\sigma}$ via (4.5). Using the multipoint Padé scheme from section 4.3.1 compute $(\kappa_j^*, \hat{\kappa}_j^*)_{j=1}^m = \mathcal{Q}(d(\cdot))$.
2. If for some j either $\kappa_j^* \leq 0$ or $\hat{\kappa}_j^* \leq 0$, decrease m to $m - 1$ and return to step 1. If all $(\kappa_j^*, \hat{\kappa}_j^*)_{j=1}^m$ are positive, fix m and continue to step 3.
3. Define the vector of logarithms $\mathbf{l}^* = (\log \kappa_1^*, \dots, \log \kappa_m^*, \log \hat{\kappa}_1^*, \dots, \log \hat{\kappa}_m^*)^T$.
4. Choose an initial guess $\mathbf{r}^{(1)} \in \mathcal{R}_+^N$ and the maximum number n_{GN} of Gauss-Newton iterations.
5. For $p = 1, \dots, n_{GN}$ perform:
 - 5.1. For the current iterate $\mathbf{r}^{(p)}$ compute the nonlinear preconditioner

$$(\kappa_j^{(p)}, \hat{\kappa}_j^{(p)})_{j=1}^m = \mathcal{Q}(y(t; \mathbf{r}^{(p)}))$$

and its Jacobian

$$\mathcal{D}\mathcal{Q}^{(p)} = \mathcal{D}\mathcal{Q}(y(t; \mathbf{r}^{(p)}))$$

as explained in section 5.

- 5.2. Define the vector of logarithms $\mathbf{l}^{(p)} = (\log \kappa_1^{(p)}, \dots, \log \kappa_m^{(p)}, \log \hat{\kappa}_1^{(p)}, \dots, \log \hat{\kappa}_m^{(p)})^T$.
- 5.3. Compute the step

$$\boldsymbol{\rho}^{(p)} = - \left(\mathcal{D}\mathcal{Q}^{(p)} \right)^\dagger \text{diag} \left(\kappa_1^{(p)}, \dots, \kappa_m^{(p)}, \hat{\kappa}_1^{(p)}, \dots, \hat{\kappa}_m^{(p)} \right) (\mathbf{l}^{(p)} - \mathbf{l}^*).$$

- 5.4. Choose the step length $\zeta^{(p)}$ and compute the Gauss-Newton update

$$\mathbf{r}^{GN} = \mathbf{r}^{(p)} + \zeta^{(p)} \boldsymbol{\rho}^{(p)}.$$

- 5.5. Compute the weight W using (6.5) with $\mathbf{r}^{GN}$ or $W = I$.
- 5.6. Solve for the next iterate $\mathbf{r}^{(p+1)}$ from

$$(6.7) \quad \begin{bmatrix} \Delta^T W \Delta & (\mathcal{D}\mathcal{Q}^{(p)})^T \\ \mathcal{D}\mathcal{Q}^{(p)} & 0 \end{bmatrix} \begin{bmatrix} \mathbf{r}^{(p+1)} \\ \boldsymbol{\lambda}^{(p)} \end{bmatrix} = \begin{bmatrix} 0 \\ (\mathcal{D}\mathcal{Q}^{(p)}) \mathbf{r}^{GN} \end{bmatrix}$$

6. The estimate is

$$\mathbf{r}^* = \mathbf{r}^{(n_{GN}+1)}.$$

Let us remark that since the nonlinear preconditioner is an approximation of the identity and most of the nonlinearity of the problem is resolved by the rational interpolation in step 1, we may start with a poor initial guess in step 4 and still obtain good reconstructions. Moreover, the number n_{GN} of Gauss-Newton iterations may be kept small. In the numerical

results presented in section 6.3 we take the number of iterations $n_{GN} = 5$ for medium contrast resistivities and $n_{GN} = 10$ for the high contrast case. The initial guess is the vector of all ones $\mathbf{r}^{(1)} = \mathbf{1}$ for all cases.

In order to simplify our implementation we set the step length $\zeta^{(p)} = 1$ in step 5.4. However, choosing $\zeta^{(p)}$ adaptively may be beneficial, especially for high contrast resistivities.

While the Jacobian $\mathcal{D}Q^{(p)}$ is well-conditioned, the system (6.7) may not be. To alleviate this problem, instead of solving (6.7) directly, we may use a truncated singular value decomposition to obtain a regularized solution. Typically it is enough to discard just one component corresponding to the smallest singular value.

6.2. Setup of the numerical experiments. We assess the performance of the inversion algorithm with numerical experiments. To avoid committing the inverse crime we use different grids for generating the data and for the solution of the inverse problem. A finer grid with $N_f = 299$ uniformly spaced nodes is used to simulate the data, and a coarser grid with $N_c = 199$ uniformly spaced nodes is used in the inversion.

The first term $y(t; \mathbf{r}^{\text{true}})$ in (2.5) is approximated by solving the semi-discrete forward problem (2.1) with an explicit forward Euler time stepping on a finite time interval $[0, T_{\max}]$, where $T_{\max} = 100$. The time step is $h_T = 10^{-5}$, and the number of time steps is $N_T = T_{\max}/h_T = 10^7$. Note that even in the absence of noise there is a systematic error $\xi^{(s)}(t)$ in the data that comes from the numerical approximation of the solution of (2.1). We denote by $\mathbf{y}$ the vector of length N_T , with entries given by the numerical approximation of $y(t; \mathbf{r}^{\text{true}})$ at the time samples $t_j = jh_T$,

$$\mathbf{y} = (y_1, \dots, y_{N_T})^T, \quad y_j = y(t_j; \mathbf{r}^{\text{true}}) + \xi^{(s)}(t_j), \quad j = 1, \dots, N_T.$$

We also define the vector $\boldsymbol{\xi}^{(n)} \in \mathbb{R}^{N_T}$ that simulates measurement noise. We use the multiplicative noise model

$$(6.8) \quad \boldsymbol{\xi}^{(n)} = \epsilon \text{diag}(\chi_1, \dots, \chi_{N_T}) \mathbf{y},$$

where ϵ is the noise level, and χ_k are independent random variables distributed normally with zero mean and unit standard deviation. The data vector $\mathbf{d} \in \mathbb{R}^{N_T}$ is

$$(6.9) \quad \mathbf{d} = \mathbf{y} + \boldsymbol{\xi}^{(n)},$$

and we denote its components by d_j , for $j = 1, \dots, N_T$.

The algorithm determines different sizes of the reduced model for different levels of noise. The larger ϵ , the smaller m . The values of ϵ and m used to obtain the results presented in section 6.3 are given in Table 6.1.

TABLE 6.1
Reduced model sizes m used for various noise levels ϵ .

ϵ	$5 \cdot 10^{-2}$	$5 \cdot 10^{-3}$	10^{-4}	0 (noiseless)
m	3	4	5	6

The transfer function and its derivative at the interpolation points are approximated by taking the discrete Laplace transform of the simulated data

$$(6.10) \quad G(\tilde{\sigma}_j) \approx \frac{T}{N_T} \sum_{k=1}^{N_T} d_k e^{-\tilde{\sigma}_j t_k},$$

$$(6.11) \quad G'(\tilde{\sigma}_j) \approx -\frac{T}{N_T} \sum_{k=1}^{N_T} d_k t_k e^{-\tilde{\sigma}_j t_k}.$$

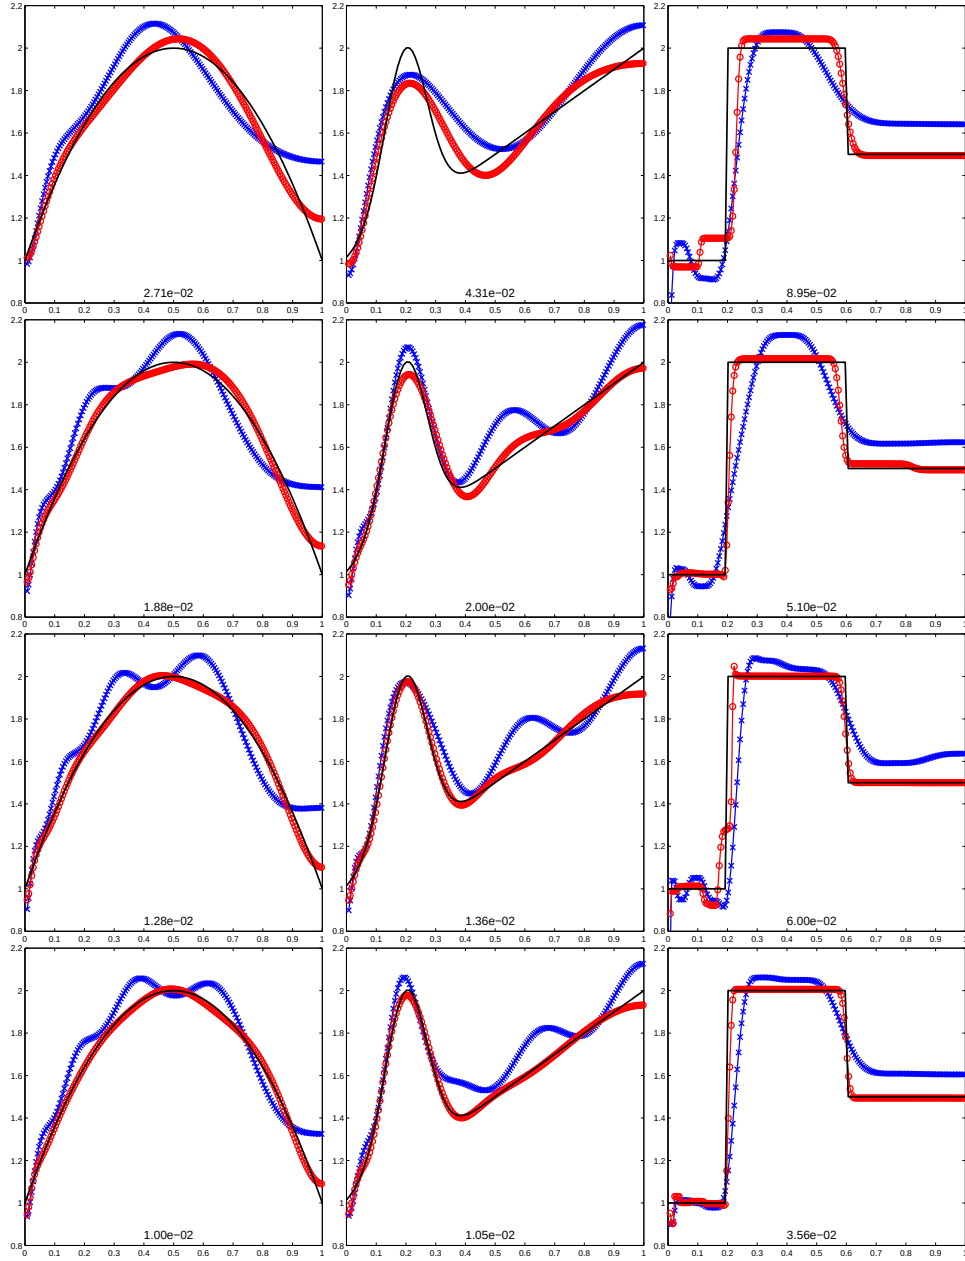


FIG. 6.1. Reconstructions of $r(x)$ (black solid line) after one (blue $\times$) and five (red $\circ$) iterations. True coefficient by column: left r_Q , middle r_L , right r_J . Reduced model size from top row to bottom row $m = 3, 4, 5, 6$. Noise levels are from Table 6.1. The relative error $\mathcal{E}$ is printed at the bottom of the plots.

To quantify the error of the reconstructions $\mathbf{r}^*$ we use the ratio of discrete ℓ_2 norms

$$(6.12) \quad \mathcal{E} = \frac{\|\mathbf{r}^* - \mathbf{r}^{\text{true}}\|_2}{\|\mathbf{r}^{\text{true}}\|_2}.$$

While such a measure of error is most appropriate for smooth resistivities, it may be overly strict for the reconstructions in the discontinuous case due to the large contribution of

discontinuities. However, even under such an unfavorable measure the inversion procedure demonstrates good performance.

6.3. Numerical results. We show first the estimates of three resistivity functions of contrast two. We consider two smooth resistivities

$$(6.13) \quad r^{\text{true}}(x) = r_Q(x) := 2 - 4 \left(x - \frac{1}{2} \right)^2,$$

$$(6.14) \quad r^{\text{true}}(x) = r_L(x) := 0.8e^{-100(x-0.2)^2} + x + 1,$$

and the piecewise constant

$$(6.15) \quad r^{\text{true}}(x) = r_J(x) := \begin{cases} 1, & \text{for } x < 0.2 \\ 2, & \text{for } 0.2 \leq x \leq 0.6 \\ 1.5, & \text{for } x > 0.6 \end{cases}$$

The results are displayed in Figure 6.1, for various reduced model sizes and levels of noise, as listed in Table 6.1. Each reconstruction uses its own realization of noise. We use five Gauss-Newton iterations $n_{GN} = 5$, and we display the solution both after one iteration and after all five. The initial guess is $r^{(1)}(x) \equiv 1$. It is far from the true resistivity $r^{\text{true}}(x)$, and yet the inversion procedure converges quickly. The features of $r^{\text{true}}(x)$ are captured well after the first iteration, but there are some spurious oscillations, corresponding to the peaks of the sensitivity functions. A few more regularized Gauss-Newton iterations remove these oscillations and improve the quality of the estimate of the resistivity. The relative error (6.12) is indicated in each plot in Figure 6.1. It is small, of a few percent in all cases.

We also observe in Figure 6.1 that the inversion method regularized with the nonlinear weight (6.5) performs well for the piecewise constant resistivity r_J . Without the regularization, the estimates have Gibbs-like oscillations near the discontinuities of $r^{\text{true}}(x)$. These oscillations are suppressed by the weighted discrete H^1 regularization.

In Figure 6.2 we are comparing our inversion procedure to an inversion approach that fits the poles and residues $(\theta_j, c_j)_{j=1}^m$ instead of the continued fraction coefficients. In such an approach we use $\mathcal{Q}_{pr}$ from (3.9) instead of $\mathcal{Q}$. The comparison is done for the case of piecewise constant resistivity of higher contrast

$$(6.16) \quad r^{\text{true}}(x) = r_H(x) := \begin{cases} 1, & \text{for } x < 0.2 \\ 5, & \text{for } 0.2 \leq x \leq 0.6 \\ 3, & \text{for } x > 0.6 \end{cases}$$

As expected, the inversion procedure obtains the reconstructions of superior quality when $\mathcal{Q}$ is used. In fact, the algorithm diverges for $m = 4$ and $m = 6$ when using $\mathcal{Q}_{pr}$. Thus, for $m = 4, 6$ we plot the first and second iterates only. On the other hand, when using $\mathcal{Q}$ the inversion procedure converges in all three cases and maintains the relative error well below 10% for $m = 4, 5$ and around 11% for $m = 6$. The reconstruction plots in Figure 6.2 are complimented with the plots of the relative error $\mathcal{E}$ versus the Gauss-Newton iteration number p . We observe from the behavior of $\mathcal{E}$ that even in the case when the iteration with $\mathcal{Q}_{pr}$ converges ($m = 5$) the resulting reconstruction for $\mathcal{Q}$ has a much better quality (18.2% for $\mathcal{Q}_{pr}$ versus 8.5% for $\mathcal{Q}$).

7. Summary. We introduced a numerical inversion algorithm for linear parabolic partial differential equations. The setup is for a one dimensional problem. It arises in the application of controlled source electromagnetic inversion, where the unknown is the subsurface electrical resistivity $r(x)$ in the earth, assumed layered along the coordinate x . The data $d(t)$ are

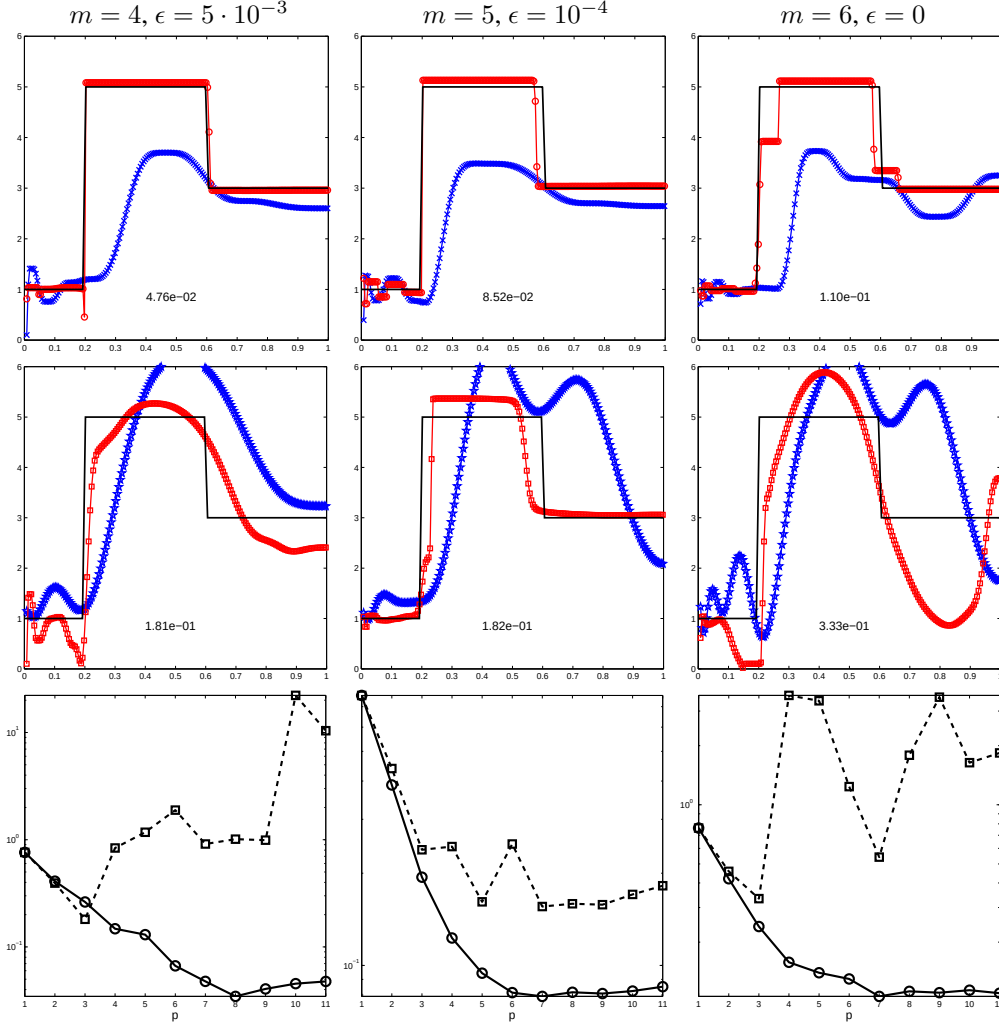


FIG. 6.2. Comparison between two preconditioners for high contrast piecewise constant resistivity $r_H(x)$ (black solid line) after one (blue $\times$ and $\star$) and n_{GN} (red $\circ$ and $\square$) iterations. Top row: reconstructions using $\mathcal{Q}$ ($n_{GN} = 10$). Middle row: reconstructions using $\mathcal{Q}_{pr}$ ($n_{GN} = 2$ for $m = 4, 6$ and $n_{GN} = 10$ for $m = 5$). Bottom row: relative error $\mathcal{E}$ versus the iteration number p for reconstructions with $\mathcal{Q}$ (solid line with $\circ$) and $\mathcal{Q}_{pr}$ (dashed line with $\square$). The relative error $\mathcal{E}$ is printed at the bottom of the reconstruction plots.

time resolved measurements of the magnetic field along a direction orthogonal to x , at the surface $x = 0$. The domain of the solution is a finite interval normalized to length one, but essentially the same ideas apply to the half line $x \in (0, \infty)$. Extensions of the algorithm to higher dimensions are possible. We will present them in a separate publication.

To motivate the inversion algorithm we place the inverse problem in a model reduction framework. We semidiscretize in x the parabolic partial differential equation on a grid with $N \gg 1$ points, and obtain a dynamical system with transfer function $G(s; \mathbf{r})$, the Laplace transform of the time measurements. The reduced model is a dynamical system of much smaller size $m \ll N$, with transfer function $G_m(s) \approx G(s; \mathbf{r})$. Because $G_m(s)$ is a rational function of s , we solve a rational approximation problem. We study various such approximants to determine which are best suited for inversion. We end up with a multipoint Padé

approximant $G_m(s)$, which interpolates G and its first derivatives at nodes distributed geometrically in $\mathbb{R}^+$.

The inversion algorithm is a Gauss-Newton iteration for an optimization problem preconditioned with a nonlinear mapping $\mathcal{Q}$. This mapping is the essential ingredient in the inversion. It takes functions in the space $\mathcal{S}$ where the unknown resistivity lies to a vector of $2m$ discrete resistivities. They are the $2m$ coefficients in the continued fraction representation of the rational function $G_m(s)$. Because $G_m(s)$ is the transfer function of a dynamical system corresponding to a finite difference discretization of our parabolic equation, the discrete resistivities are also the entries in the difference operator.

Most inversion algorithms estimate the resistivity by minimizing over resistivities $\mathbf{r} \in \mathcal{S}$ the least squares misfit of the data $d(t)$ and the mathematical model $y(t; \mathbf{r})$ of the measurements. Because our mapping $\mathcal{Q}(y(\cdot; \mathbf{r}))$ is an approximate identity when restricted to a subset of sufficiently regular resistivities $\mathbf{r}$, we use it as a preconditioner in our inversion approach, and minimize the least squares misfit of $\mathcal{Q}(d(t))$ and $\mathcal{Q}(y(t; \mathbf{r}))$. The advantage is the increased stability of the inversion and very fast convergence of the iteration.

The nonlinear preconditioner $\mathcal{Q}(y(\cdot; \mathbf{r}))$ is defined via an explicit chain of mappings. Each step in the chain involves a numerically stable computation. The computation of the Jacobian $\mathcal{D}\mathcal{Q}$ follows by the chain rule and we describe it explicitly, step by step. The only unstable computation in the inversion is the calculation of $\mathcal{Q}(d(t))$. The instability is inherited from that of the inverse problem and is unavoidable. We mitigate it by restricting the size m of the reduced model adaptively, depending on the noise level. The smaller m is, the lower the resolution of the estimated resistivity. This is because at each iteration the resistivity updates are in the range of $(\mathcal{D}\mathcal{Q})^\dagger$, of low dimension $2m \ll N$. We improve the results by adding corrections in the null space of $\mathcal{D}\mathcal{Q}$, so that we minimize a regularization functional that incorporates prior information about the unknown resistivity. The performance of the algorithm is assessed with numerical simulations.

Acknowledgments. The work of L. Borcea was partially supported by the AFSOR Grant FA9550-12-1-0117, the ONR Grant N00014-12-1-0256, and by the NSF Grants DMS-0907746, DMS-0934594. The work of A. Mamonov was partially supported by the NSF grants DMS-0934594, DMS-0914465 and DMS-0914840.

REFERENCES

- [1] A. ABUBAKAR, T. HABASHY, V. DRUSKIN, L. KNIZHNERMAN, AND D. ALUMBAUGH, *2.5 D forward and inverse modeling for interpreting low-frequency electromagnetic measurements*, Geophysics, 73 (2008), pp. F165–F177.
- [2] S. ASVADUROV, V. DRUSKIN, AND L. KNIZHNERMAN, *Application of the difference Gaussian rules to solution of hyperbolic problems*, Journal of Computational Physics, 158 (2000), pp. 116–135.
- [3] L. BORCEA, V. DRUSKIN, AND F. GUEVARA VASQUEZ, *Electrical impedance tomography with resistor networks*, Inverse Problems, 24 (2008), p. 035013 (31pp).
- [4] L. BORCEA, V. DRUSKIN, AND L. KNIZHNERMAN, *On the continuum limit of a discrete inverse spectral problem on optimal finite difference grids*, Communications on Pure and Applied Mathematics, 58 (2005), pp. 1231–1279.
- [5] L. BORCEA, V. DRUSKIN, AND A. MAMONOV, *Circular resistor networks for electrical impedance tomography with partial boundary measurements*, Inverse Problems, 26 (2010), p. 045010.
- [6] L. BORCEA, V. DRUSKIN, A. MAMONOV, AND F. GUEVARA VASQUEZ, *Pyramidal resistor networks for electrical impedance tomography with partial boundary measurements*, Inverse Problems, 26 (2010), p. 105009.
- [7] R. BÖRNER, O. ERNST, AND K. SPITZER, *Fast 3-D simulation of transient electromagnetic fields by model reduction in the frequency domain using Krylov subspace projection*, Geophysical Journal International, 173 (2008), pp. 766–780.
- [8] V. DRUSKIN AND L. KNIZHNERMAN, *Gaussian spectral rules for second order finite-difference schemes*, Numerical Algorithms, 25 (2000), pp. 139–159.

- [9] ———, *Gaussian spectral rules for the three-point second differences: I. A two-point positive definite problem in a semi-infinite domain*, SIAM Journal on Numerical Analysis, 37 (2000), pp. 403–422.
- [10] V. DRUSKIN, L. KNIZHNERMAN, AND M. ZASLAVSKY, *Solution of large scale evolutionary problems using rational Krylov subspaces with optimized shifts*, SIAM Journal on Scientific Computing, 31 (2009), p. 3760.
- [11] V. DRUSKIN, C. LIEBERMAN, AND M. ZASLAVSKY, *On adaptive choice of shifts in rational Krylov subspace reduction of evolutionary problems*, SIAM Journal of Scientific Computing, 32 (2010), pp. 2485–2496.
- [12] V. DRUSKIN, V. SIMONCINI, AND M. ZASLAVSKY, *Solution of the time-domain inverse resistivity problem in the model reduction framework. Part I. One-dimensional problem with siso data*, 2012. Preprint: <http://www.dm.unibo.it/~simoncin/frechet12.pdf>.
- [13] V. DRUSKIN AND M. ZASLAVSKY, *On combining model reduction and Gauss–Newton algorithms for inverse partial differential equation problems*, Inverse problems, 23 (2007), p. 1599.
- [14] A. FROMMER AND V. SIMONCINI, *Matrix functions*, Model order reduction: theory, research aspects and applications, (2008), pp. 275–303.
- [15] K. GALLIVAN, E. GRIMME, AND P. VAN DOOREN, *A rational Lanczos algorithm for model reduction*, Numerical Algorithms, 12 (1996), pp. 33–63.
- [16] P. GONNET, S. GUETTEL, AND L. TREFETHEN, *Robust Padé approximation via SVD*, SIAM review, (2011).
- [17] F. GUEVARA VASQUEZ, *On the parametrization of ill-posed inverse problems arising from elliptic partial differential equations*, PhD thesis, Rice University, Houston, TX, USA, 2006.
- [18] S. GUGERCIN, A. ANTOULAS, AND C. BEATTIE, *$\mathcal{H}_2$ Model Reduction for Large-Scale Linear Dynamical Systems*, SIAM Journal on Matrix Analysis and Applications, 30 (2008), pp. 609–638.
- [19] D. INGERMAN, V. DRUSKIN, AND L. KNIZHNERMAN, *Optimal finite difference grids and rational approximations of the square root I. Elliptic problems*, Communications on Pure and Applied Mathematics, 53 (2000), pp. 1039–1066.
- [20] M. KILMER, S. GUGERCIN, C. BEATTIE, S. CHATURANTABUT, M.-K. HUFFMAN, AND E. DE STURLER, *Challenges in modern medical image reconstruction*. Proceedings of 2012 SIAM Conference on Applied Linear Algebra.
- [21] A. MAMONOV, *Resistor Networks and Optimal Grids for the Numerical Solution of Electrical Impedance Tomography with Partial Boundary Measurements*, PhD thesis, Rice University, Houston, TX, USA, 2010.
- [22] G. NEWMAN AND D. ALUMBAUGH, *Three-dimensional magnetotelluric inversion using non-linear conjugate gradients*, Geophysical journal international, 140 (2000), pp. 410–424.
- [23] T. WANG, M. ORISTAGLIO, A. TRIPP, AND G. HOHMANNL, *Inversion of diffusive transient electromagnetic data by a conjugate-gradient method*, Radio science, 29 (1994), pp. 1143–1156.
- [24] M. ZASLAVSKY, V. DRUSKIN, A. ABUBAKAR, AND T. HABASHY, *Large-scale Gauss-Newton inversion of transient CSEM data using the model reduction framework*, Geophysics, (2012). Submitted.
- [25] M. ZHDANOV, *Geophysical inverse theory and regularization problems*, vol. 36, Elsevier Science Ltd, 2002.